

A

B

C

D

E

F


1

2

3

4


5

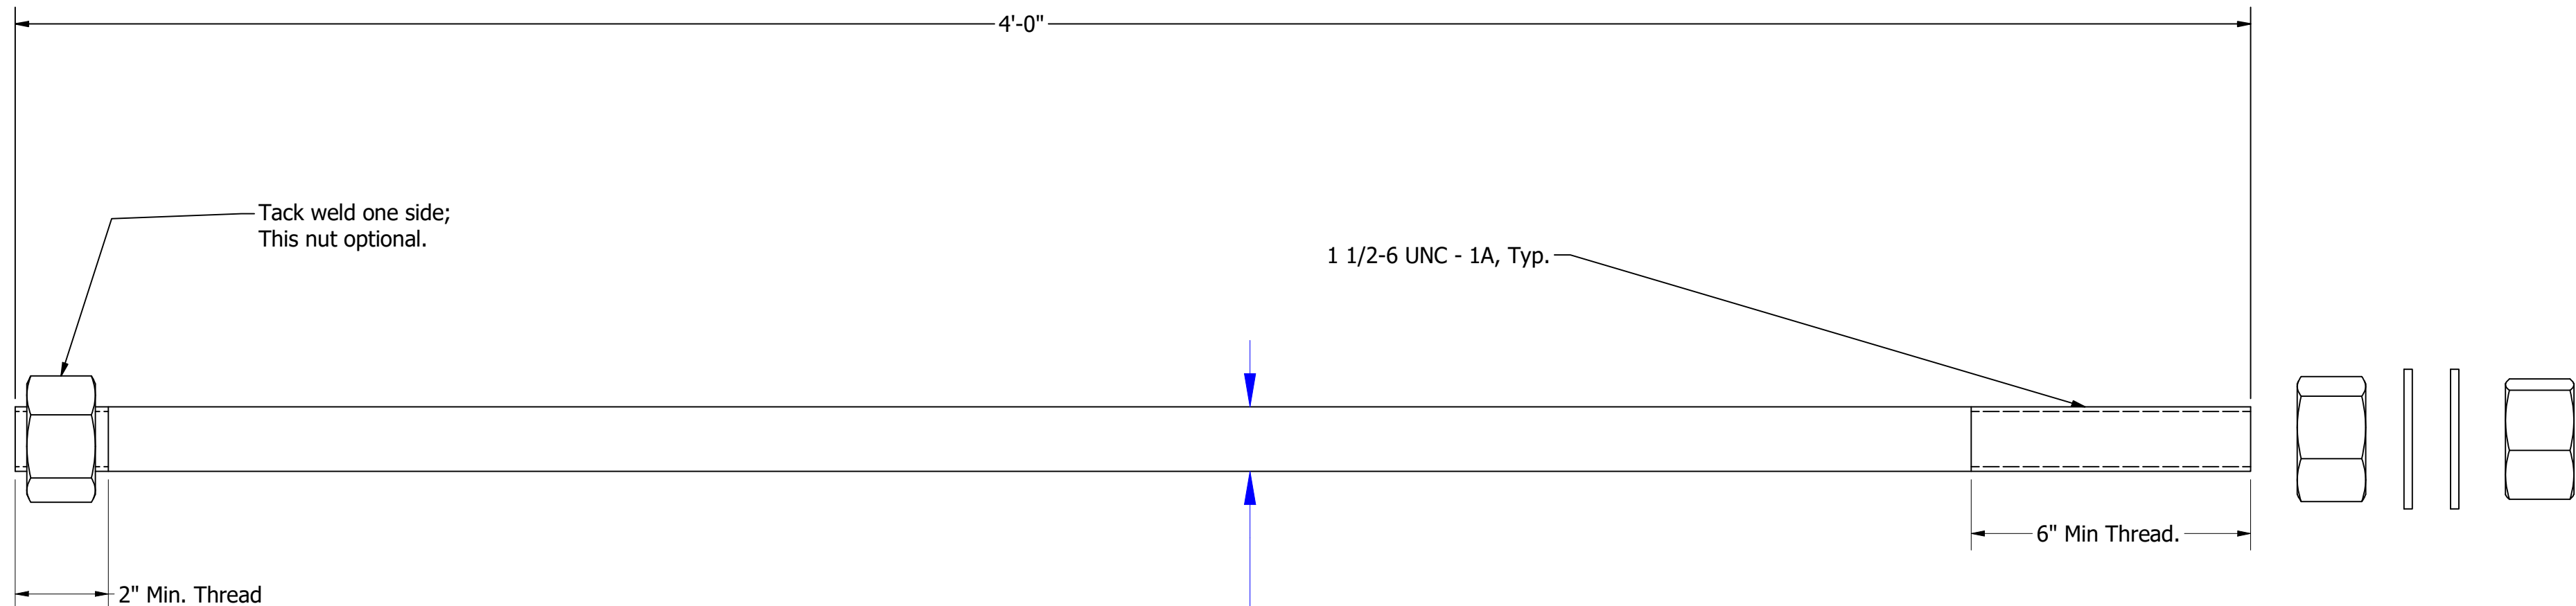

Undersized Diameter for Roll Thread,  
 $\text{Ø}1.381$  min.

Available in the Following Grades:

- F1554 Gr. 55
- F1554 Gr. 55 Hot Dip Galv.
- F1554 Gr. 105
- 304 Stainless

UNLESS OTHERWISE SPECIFIED				DRAWN: Alan Harris		12/21/2021		 Alexander Screw Products, Inc.		8750 Pendleton Pike Indianapolis, IN 46226	
DIMENSIONS ARE IN INCHES				MATERIAL		CHECK:		TITLE:		REV.	
.X	.XX	.XXX	ANGLE	SAE 304				AS150048S			
±	±	±	± 0.5°			ENGR:		12/21/2021			
FINISH						MFG:					
125 ✓						REVISION BY:					
DIMENSIONING & TOLERANCING PER ASME Y14.5-2009 ALL DIMENSIONS IN INCHES [MM] BEFORE / AFTER SURFACE TREATMENT REMOVE ALL BURS AND SHARP EDGES THREADS: EXT CLASS 2A, INT 2B PROTECTIVE WRAP OR EQUIV. IDENTIFY PART ON WRAP OR EQUIV.				FINISH		CUSTOMER:		SCALE		SHEET	
				Stainless				C		Anchor Bolt Print	
								WT 25.264 lbmass		1 OF 1	

Anchor Bolt Print

P/N