

A

B

C

D

E

F

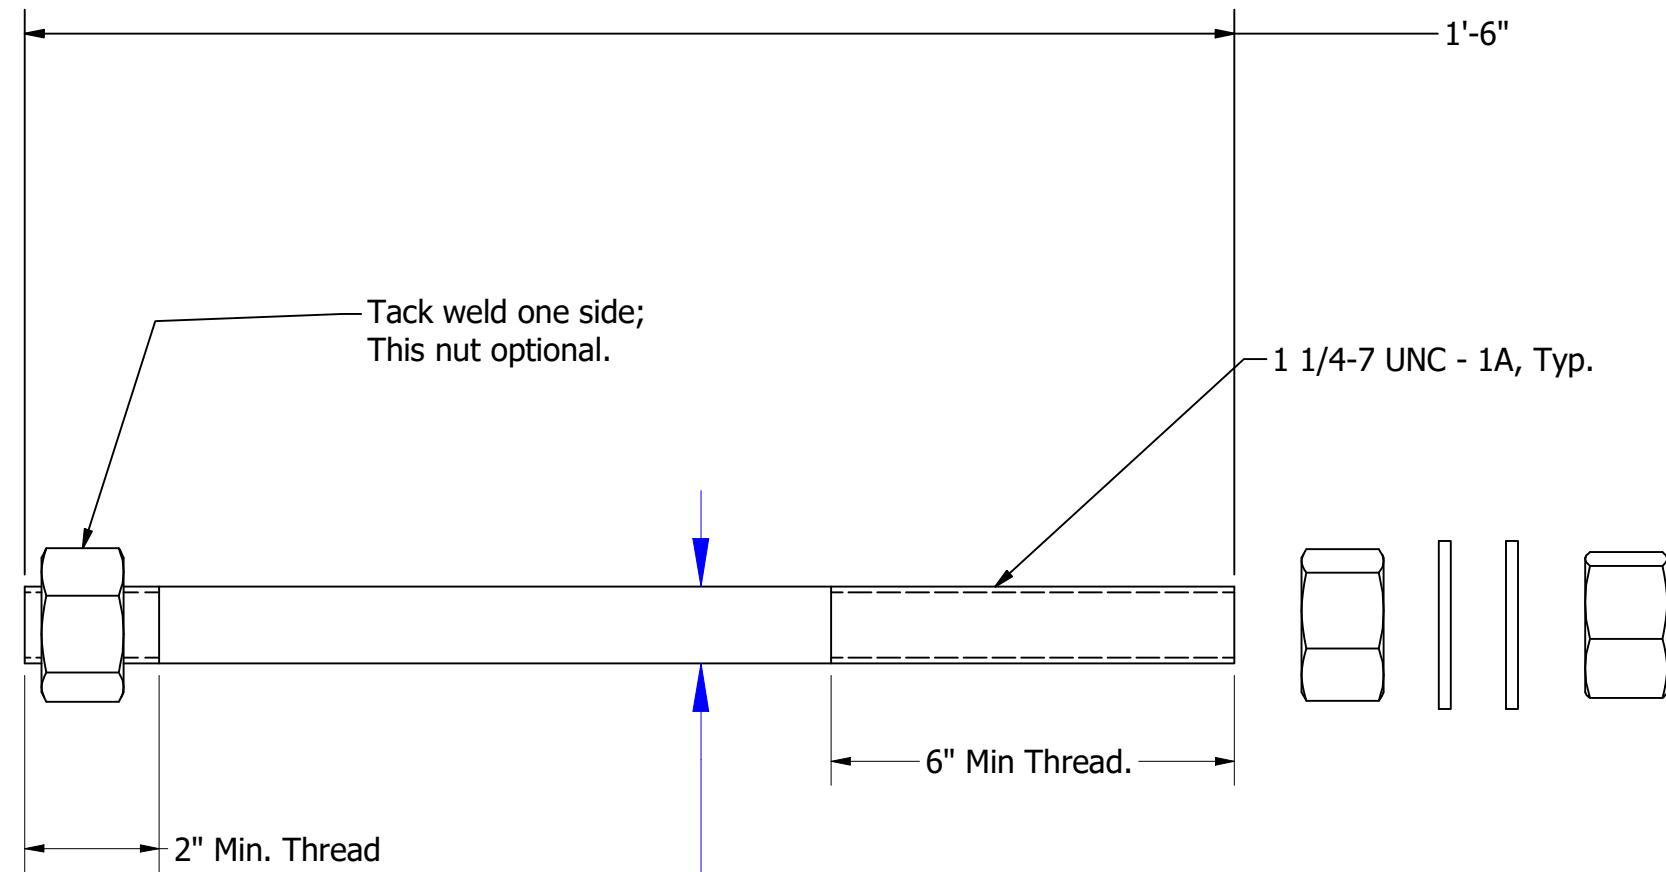
1

2

3

4




5



Undersized Diameter for Roll Thread,
 Ø1.148 min.

Available in the Following Grades:

- F1554 Gr. 55
- F1554 Gr. 55 Hot Dip Galv.
- F1554 Gr. 105
- 304 Stainless

UNLESS OTHERWISE SPECIFIED				DRAWN: Alan Harris		12/21/2021		 Alexander Screw Products, Inc.		8750 Pendleton Pike Indianapolis, IN 46226	
DIMENSIONS ARE IN INCHES				MATERIAL		CHECK:		TITLE:		REV.	
.X	.XX	.XXX	ANGLE	F-1554 Grade 105		12/21/2021		AS125018H			
±	±	±	± 0.5°	FINISH		ENGR:		MFG:		SCALE	
	125 ✓			Plain		REVISION BY:		CUSTOMER:		C Anchor Bolt Print	
DIMENSIONING & TOLERANCING PER ASME Y14.5-2009 ALL DIMENSIONS IN INCHES [MM] BEFORE / AFTER SURFACE TREATMENT REMOVE ALL BURRS AND SHARP EDGES THREADS: EXT CLASS 2A, INT 2B PROTECTIVE WRAP OR EQUIV. IDENTIFY PART ON WRAP OR EQUIV.										SHEET 1 OF 1	
								WT N/A			

Anchor Bolt Print

P/N