
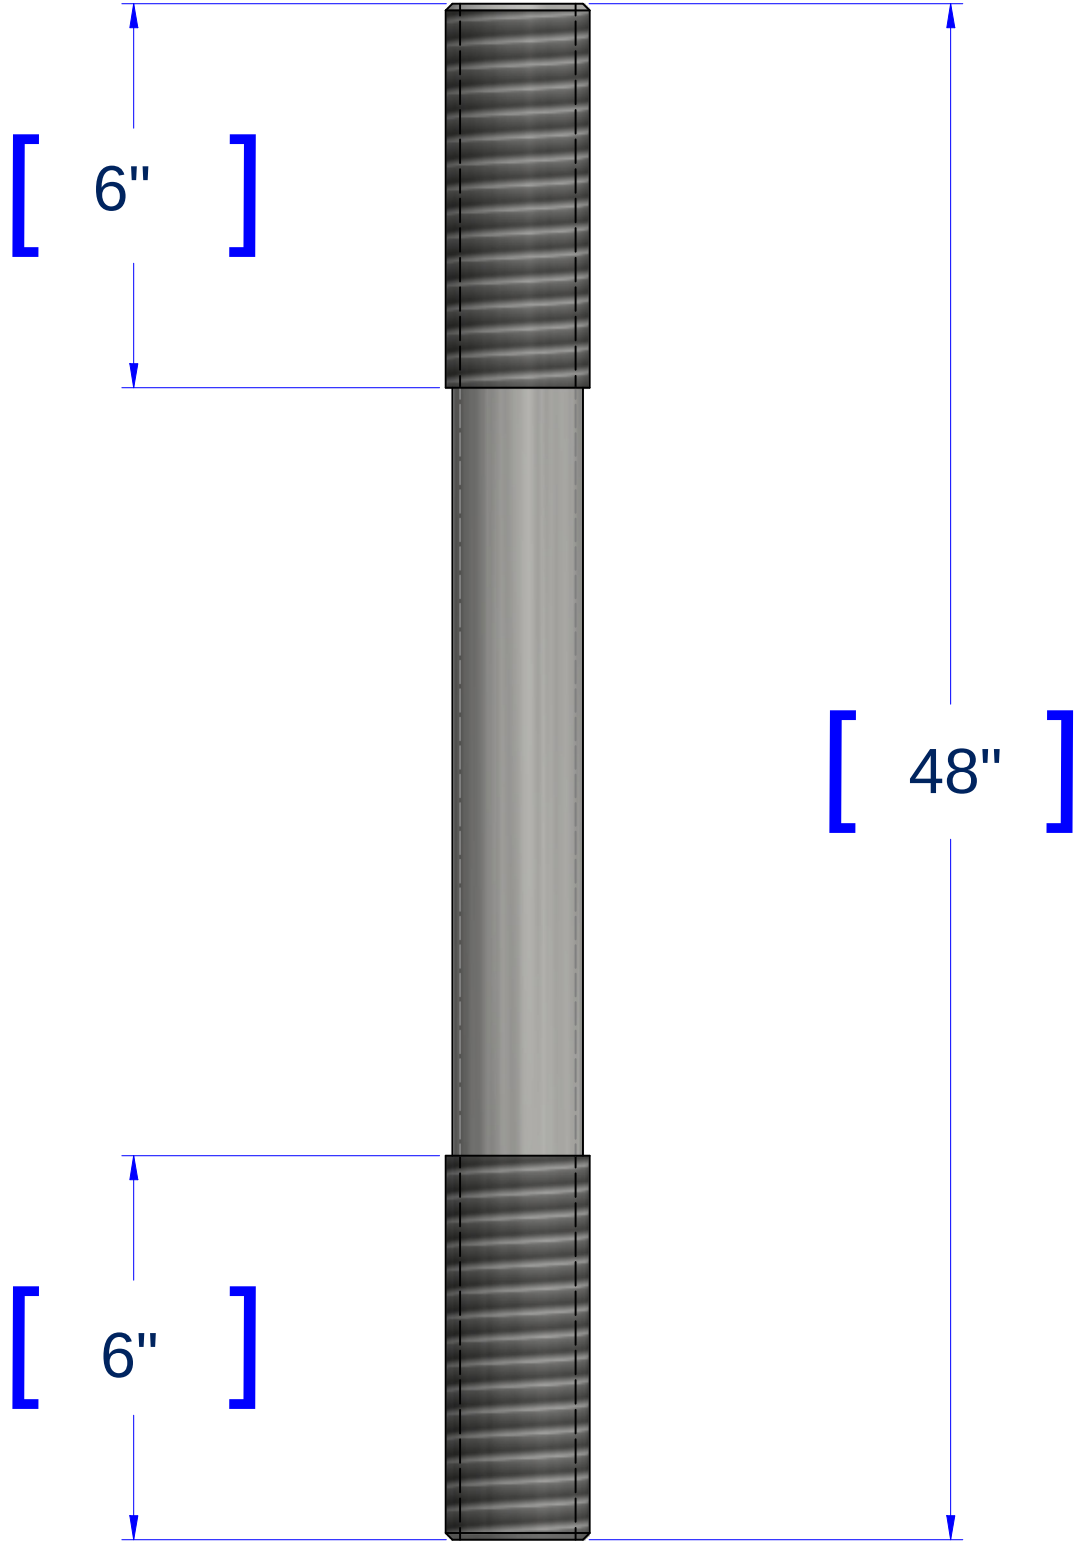



	A	B	C	D	E	F							
1	[1 1-2"] ANCHOR BOLT		 	X 1 X 1	☒ Gr A ☐ Gr C ☐ DH ☐ 2H ☒ USS FW ☐ F436 ☐ PLATE								
2													
3													
4													
5			 	X 1 X 1	☒ USS FW ☐ F436 ☐ PLATE ☒ Gr A ☐ Gr C ☐ DH ☐ 2H								
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES All bolts are roll threaded from undersized material per the F1554 Standard. Galvanized bolts shall meets F2329-11. All Threads meet a minimum of 1A and are made from unground F1554 Hot Roll Material.			 Alexander Screw Products, Inc. 8750 Pendleton Pike Indianapolis, IN 46226 <table><tr><td>GRADE: ☐ F1554 A36 ☐ F1554 55-S1 ☒ F1554 105 ☐ 304 STAINLESS ☐ </td><td>FINISH: ☒ PLAIN STEEL ☐ HOT DIP GALVANIZE</td></tr><tr><td>PART #: AS150048H</td><td>CHOP LENGTH: 48"</td></tr><tr><td colspan="2">ROLL THREAD Ø: 1.386"</td></tr><tr><td colspan="2">THREAD SIZE: 1"-8</td></tr></table>			GRADE: ☐ F1554 A36 ☐ F1554 55-S1 ☒ F1554 105 ☐ 304 STAINLESS ☐	FINISH: ☒ PLAIN STEEL ☐ HOT DIP GALVANIZE	PART #: AS150048H	CHOP LENGTH: 48"	ROLL THREAD Ø: 1.386"		THREAD SIZE: 1"-8	
GRADE: ☐ F1554 A36 ☐ F1554 55-S1 ☒ F1554 105 ☐ 304 STAINLESS ☐	FINISH: ☒ PLAIN STEEL ☐ HOT DIP GALVANIZE												
PART #: AS150048H	CHOP LENGTH: 48"												
ROLL THREAD Ø: 1.386"													
THREAD SIZE: 1"-8													