
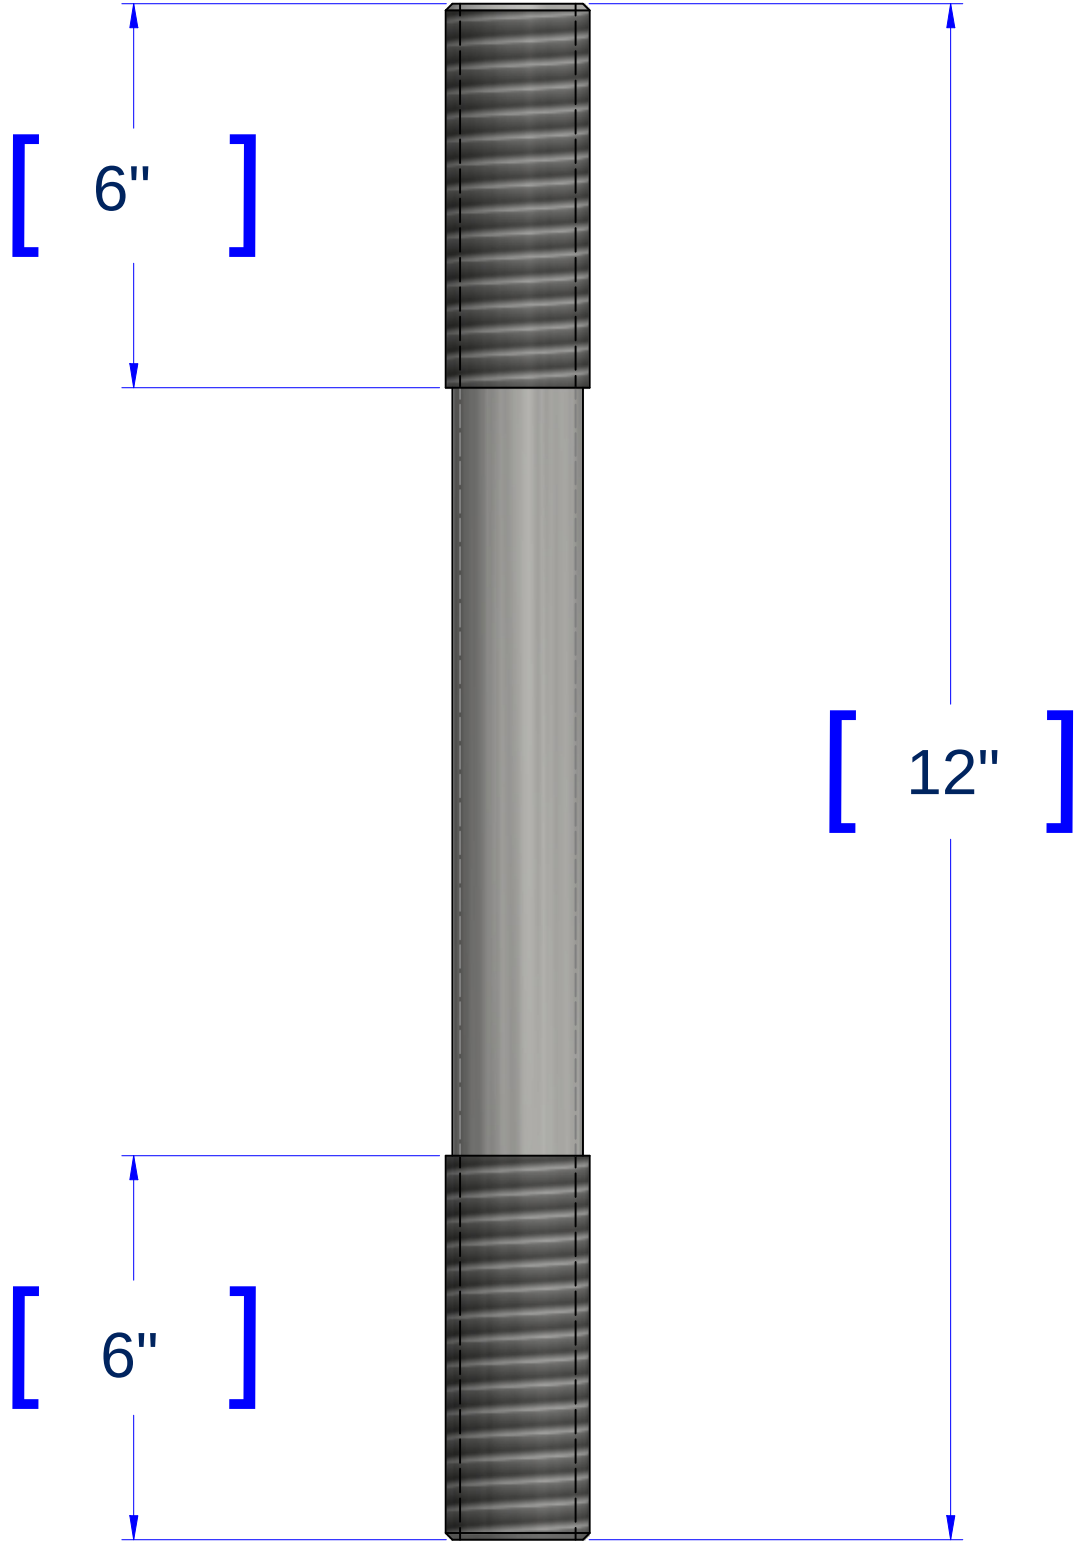



	A	B	C	D	E	F						
1	[1/2"] ANCHOR BOLT			X	1	☒ Gr A ☐ Gr C ☐ DH ☐ 2H						
				X	1	☒ USS FW ☐ F436 ☐ PLATE						
2												
3												
4												
				X	1	☒ USS FW ☐ F436 ☐ PLATE						
				X	1	☒ Gr A ☐ Gr C ☐ DH ☐ 2H						
5	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES All bolts are roll threaded from undersized material per the F1554 Standard. Galvanized bolts shall meets F2329-11. All Threads meet a minimum of 1A and are made from unground F1554 Hot Roll Material.		 Alexander Screw Products, Inc. 8750 Pendleton Pike Indianapolis, IN 46226 <table><tr><td>GRADE: ☒ F1554 A36 ☐ F1554 55-S1 ☐ F1554 105 ☐ 304 STAINLESS ☐ </td><td>FINISH: ☒ PLAIN STEEL ☐ HOT DIP GALVANIZE</td></tr><tr><td>PART #: AS050012P</td><td>CHOP LENGTH: 12"</td></tr></table> <table><tr><td>ROLL THREAD Ø: 0.446"</td><td>THREAD SIZE: 1/2"-13</td></tr></table>				GRADE: ☒ F1554 A36 ☐ F1554 55-S1 ☐ F1554 105 ☐ 304 STAINLESS ☐	FINISH: ☒ PLAIN STEEL ☐ HOT DIP GALVANIZE	PART #: AS050012P	CHOP LENGTH: 12"	ROLL THREAD Ø: 0.446"	THREAD SIZE: 1/2"-13
GRADE: ☒ F1554 A36 ☐ F1554 55-S1 ☐ F1554 105 ☐ 304 STAINLESS ☐	FINISH: ☒ PLAIN STEEL ☐ HOT DIP GALVANIZE											
PART #: AS050012P	CHOP LENGTH: 12"											
ROLL THREAD Ø: 0.446"	THREAD SIZE: 1/2"-13											