

A

B


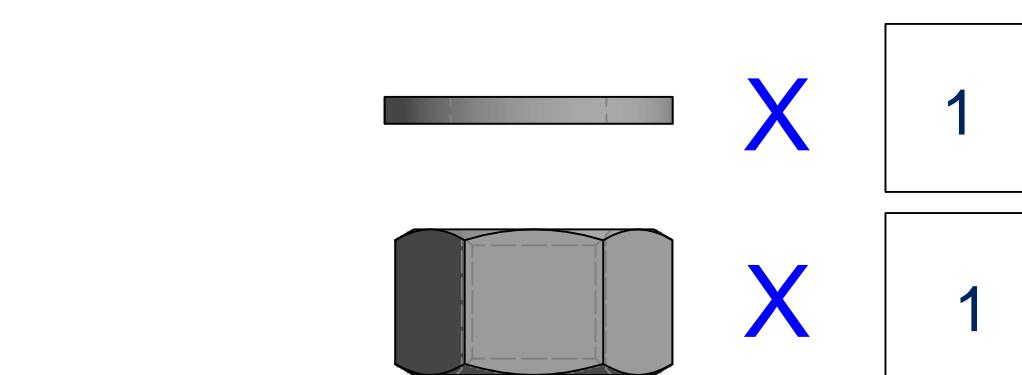
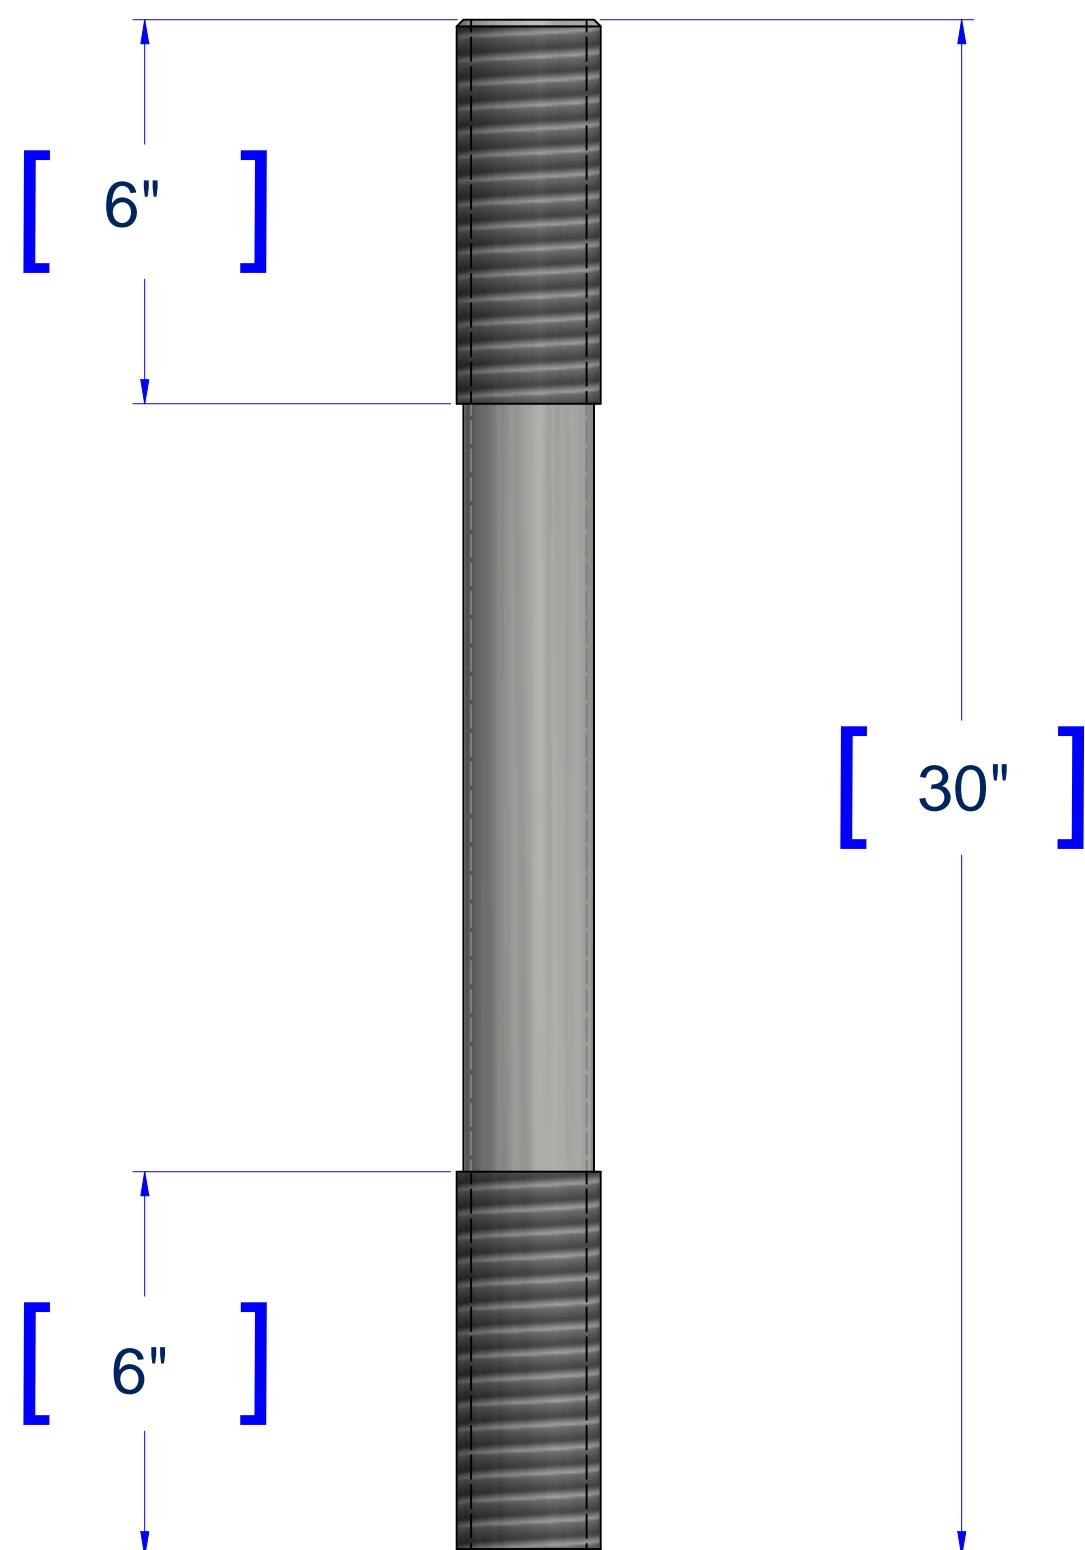

C

D

E

F

[1/2"] ANCHOR BOLT

 1 Gr A Gr C DH 2H 1 USS FW F436 PLATE 1 USS FW F436 PLATE 1 Gr A Gr C DH 2H

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES	GRADE: <input checked="" type="checkbox"/> F1554 A36 <input type="checkbox"/> F1554 55-S1 <input type="checkbox"/> F1554 105 <input type="checkbox"/> 304 STAINLESS <input type="checkbox"/> <input type="text"/>	FINISH: <input checked="" type="checkbox"/> PLAIN STEEL <input type="checkbox"/> HOT DIP GALVANIZE
All bolts are roll threaded from undersized material per the F1554 Standard. Galvanized bolts shall meet F2329-11. All Threads meet a minimum of 1A and are made from unground F1554 Hot Roll Material.	ROLL THREAD Ø: <input type="text" value="0.446"/>	THREAD SIZE: <input -13"="" type="text" value="1/2"/>
PART #: <input type="text" value="AS050030P"/>	CHOP LENGTH: <input type="text" value="30"/>	